


## AEROBEAM<sup>®</sup> LED LIGHT FIXTURES FOR ELEVATORS

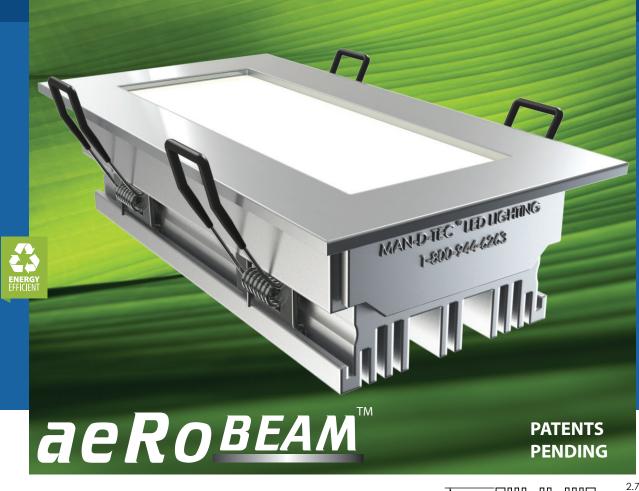

## AEROBEAM by Man-D-Tec®

## UNIQUE, PATENT PENDING, RECTANGULAR LED LIGHTING SYSTEM, DESIGNED SPECIFICALLY FOR ELEVATOR APPLICATIONS.

Warm white 6 watt LED output that produces 573 lumens per fixture. Systems include a power supply with pre-installed dimmer control and prewired harnesses for easy installation. The rectangular fixture design creates a unique look and the wide angle beam produces light output with even lighting (eliminates pixilation).

Product Specifications on the back of page.

44**B**D


F329545


ELEVATOR CONTROL, ELEVATOR ACCESSORY















	Fixture OBEAM)	MATERIAL	Aluminum Casting			44BD Elevator Control, FI Evator Accessory	
(AERC		DIMENSIONS	1.49" 2.75" x 5.75" 3.25" x 6.25"	Overall Height Cutout Hole (Rectangle) Overall Dimension	LISTED	E329545	
		MOUNTING	Spring Clips	Rubberized to reduce chatter (sound dampening)			
		FINISHES	Black Brushed Polished White Gold	Powder Coat <b>STANDARD</b> #4 Silver Brushed Finish (Option) High Luster #8 Mirror Finish (Option) Powder Coat (Option) Powder Coat (Option)			
		OUTPUT	573 Lumens As per LM-79 repo	Warm White (Approx 3,031k) ort by an iAS Accredited Laboratory	ligh fa	lighting facts	
		LED		6 Watts of LEDs Per Fixture Wide Angle <b>! Pre-Installed Dimmer Control is Include</b> to 6 Watts of LED Output Per Fixture	d!		
		LUMINOUS EFFICACY	90.4	Lumens Per Watt			

Power	MATERIAL	.060 Aluminum		
Supply	DIMMER	INCLUDED		<b>44BD</b> ELEVATOR CONTROL, ELEVATOR ACCESSORY <b>E329545</b>
	VOLTAGE	Input: 115 VAC (220VAC Also Available)		
Wiring	SECONDARY (OUTPUT)	Pre-harnessed with quick connects at power supply and at each fixture		



## ELS-LED-2C

Powers (2) two aeRoBeam fixtures to meet ANSI 17.1 & ASME 17.3-2008 Elevator Code.

(Optional)

EXCEEDS A17.3 4-HOUR RUNTIME CODE REQUIREMENT FOR EMERGENCY LIGHTING.



MAN-D-TEC, INC. 
 8175 E. PARADISE LANE
 P. 480.998.0325

 SCOTTSDALE, AZ 85260
 F. 480.998.0318

