




ILLUMINATOR®

REVISION: F

EFFECTIVE: 7/2015

ILLUMINATOR®

LED DOWNLIGHT FIXTURES FOR ELEVATORS

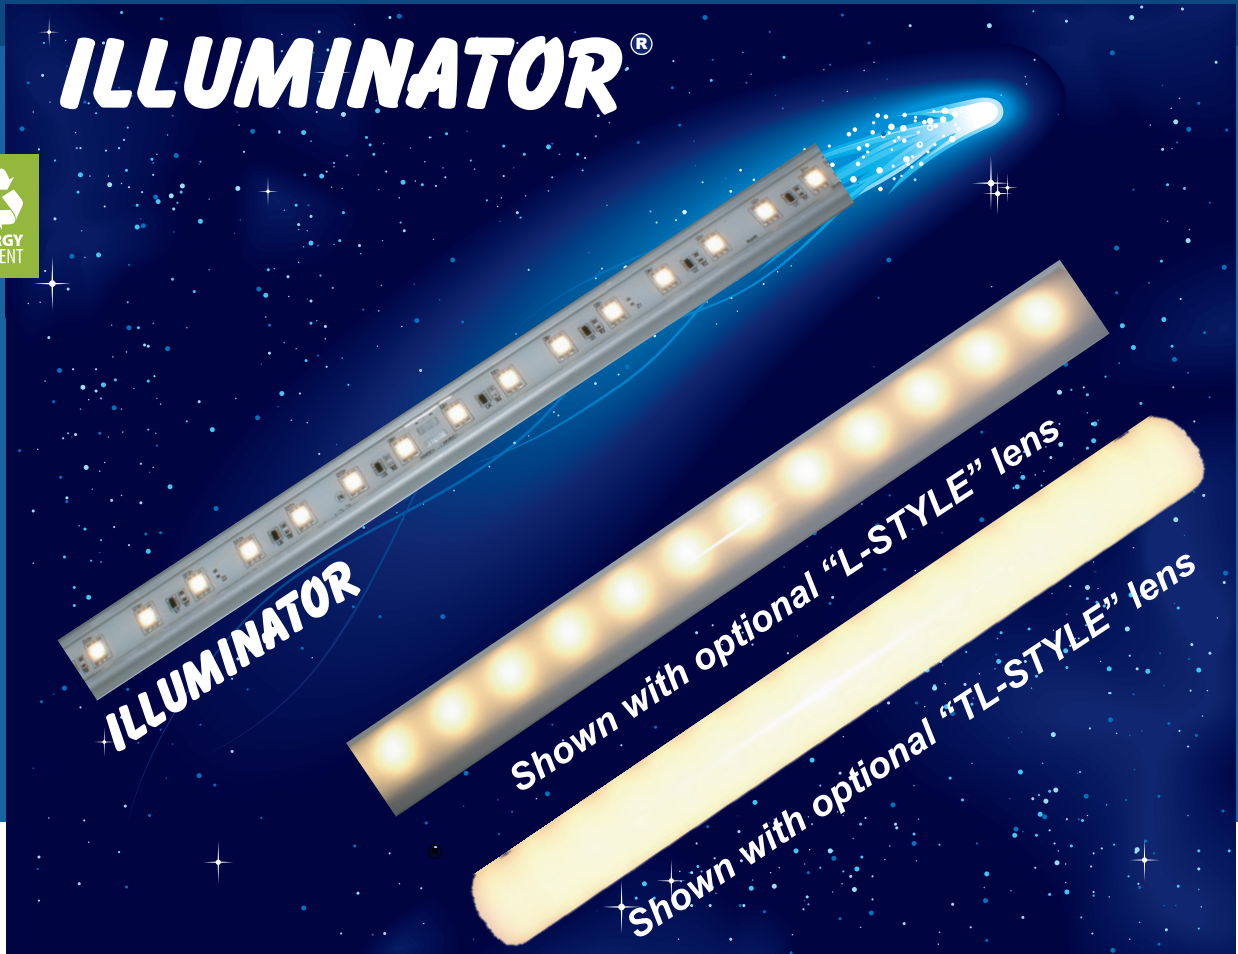


ILLUMINATOR by Man-D-Tec®

LED LINEAR COVE LIGHTING FOR ELEVATORS.

Warm white linear LED lighting at 4 watts per foot. Designed to be mounted as cove/perimeter lighting, or as a direct source of light into the cab. Highlight artwork, wall decorations, company logos on cab walls, menus or programs (in hotel elevators), or use it as a downlight to upgrade your lighting. Five lengths are available, with quick-connect installation, silver anodized aluminum construction, and a wide beam angle for superior lighting on cab walls.

Product Specifications on the back of page.

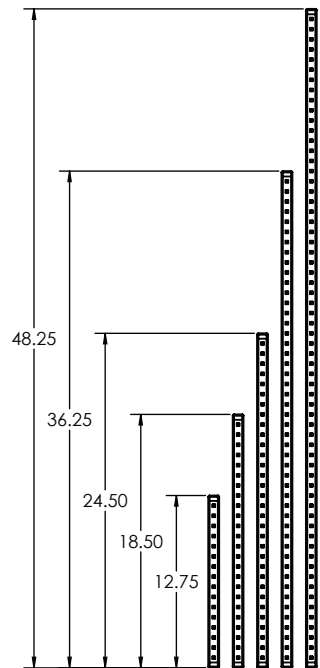

44BD
ELEVATOR CONTROL,
ELEVATOR ACCESSORY
E329545



1.800.944.6263

WWW.MANDTEC.COM

ILLUMINATOR®

REVISION: F
EFFECTIVE: 7/2015

ILLUMINATOR®

SPECIFICATIONS

Fixture (ILLUMINATOR)

MATERIAL Aluminum Extrusion

DIMENSIONS **0.25"** Overall Thickness
0.88" Overall Width
Varies (see sizes) Overall Length



44BD
ELEVATOR CONTROL,
ELEVATOR ACCESSORY
E329545

FINISH Silver Anodized Aluminum

LED COLOR Warm White (Approx 2,950k)

OUTPUT **208 Lumens** 12.75" Fixture *As per LM-79 report by an iAS Accredited Laboratory*
312 Lumens 18.50" Fixture
416 Lumens 24.50" Fixture
625 Lumens 36.25" Fixture
833 Lumens 48.25" Fixture

**5 SIZES
AVAILABLE!!**



LED **Wattage** 4 Watts per foot
Emitting Angle 100 degree wide angle helps prevent dark spots

Mounting Choices

HIGH BOND ADHESIVE TAPE Included, No Charge

SW110 & SW260 (SWIVEL BRACKETS) 110° & 260° Precision Light Control, Optional (see Accessories)
Compatible with our optional lenses

MOUNTING BRACKETS Supplied Upon Request (Does NOT Work with Optional Lens),
No Charge

Power Supply

MATERIAL .060 Aluminum

PART# PS80 Output: 80 watts (POWERS UP TO 18 FEET OF ILLUMINATOR)
PART # PS160 Output: 160 watts (POWERS UP TO 36 FEET OF ILLUMINATOR)

DIMMER *OPTIONAL*

VOLTAGE **Input:** 115 VAC (220VAC Also Available)
Output: 24 VDC



44BD
ELEVATOR CONTROL,
ELEVATOR ACCESSORY
E329545

Wiring

SECONDARY (OUTPUT) Pre-harnessed with quick connects at power supply
and at each fixture

Emergency (Optional)

ELS-ILLUMINATOR®
Powers up to 18 feet of Illuminator during power failure to meet ANSI 17.1 & ASME 17.3-2008
Elevator Code.

EXCEEDS A17.3 4-HOUR RUNTIME CODE REQUIREMENT FOR EMERGENCY LIGHTING.



MAN-D-TEC, INC.

8175 E. PARADISE LANE
SCOTTSDALE, AZ 85260

P. 480.998.0325
F. 480.998.0318

1.800.944.6263

WWW.MANDTEC.COM